

# WILLIAM MARVY COMPANY, INC.

1540 St. Clair Avenue • St. Paul, MN 55105

651-698-0726 • 800-874-2651

wmmarvyco.com

## BARBER POLE MOTOR INFORMATION AND INSTALLATION INSTRUCTIONS


Enclosed with this motor you will find an envelope containing two (2) wire nuts, two (2) rubber grommets, and two (2) motor mounting screws.


The first step is to re-drill your old motor mounting plate to accept this new motor. (**Please see templates and remaining instructions on the reverse side of this sheet.**) The two (2) new holes are located at the punch-outs on the diagram. BEFORE DRILLING, PLEASE NOTE THE INSTRUCTIONS IN STEP TWO (2) ON REVERSE SIDE OF THIS SHEET. Once the motor is securely mounted, follow the wiring instructions below.

### WIRING INSTRUCTIONS:

Each motor has two (2) wires leading out of it (1-Black and 1-White). **SEE DIAGRAM BELOW.** Secure the two (2) wires coming from the Barber Pole to the two (2) wires coming from the motor with the wire nuts provided in the enclosed envelope. Black and white wires, from motor, can connect to either color wire on the barber pole. This completes the wiring of the motor.

This barber pole motor has been designed to give many years of trouble-free service. If you have any questions regarding the installation of this motor, please call our service department at 651-698-0726 or 800-874-2651.

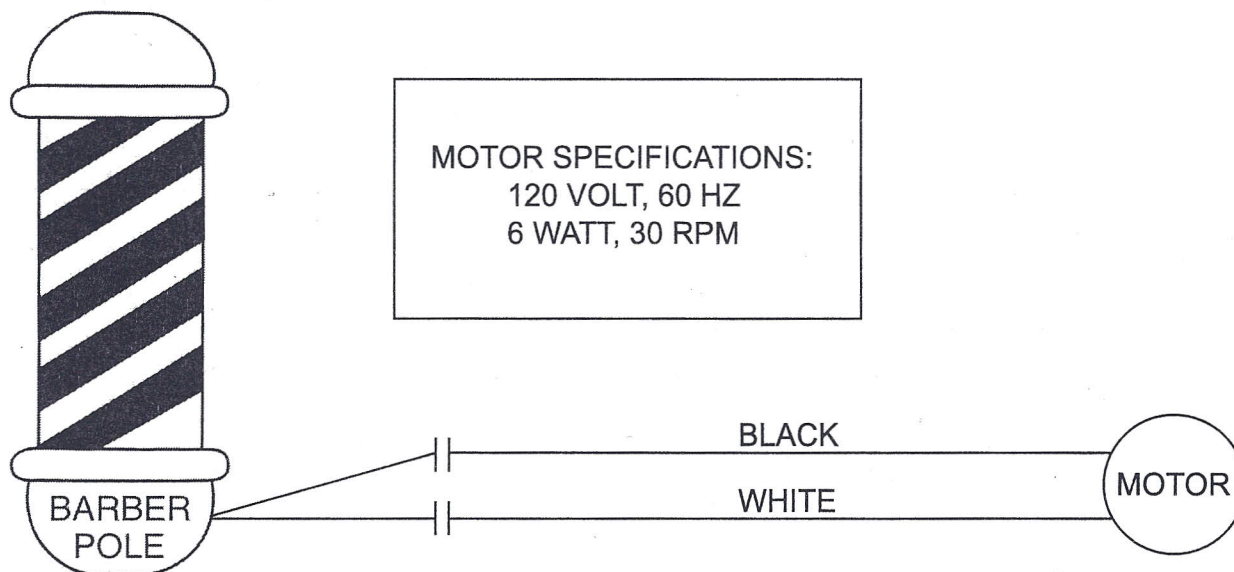

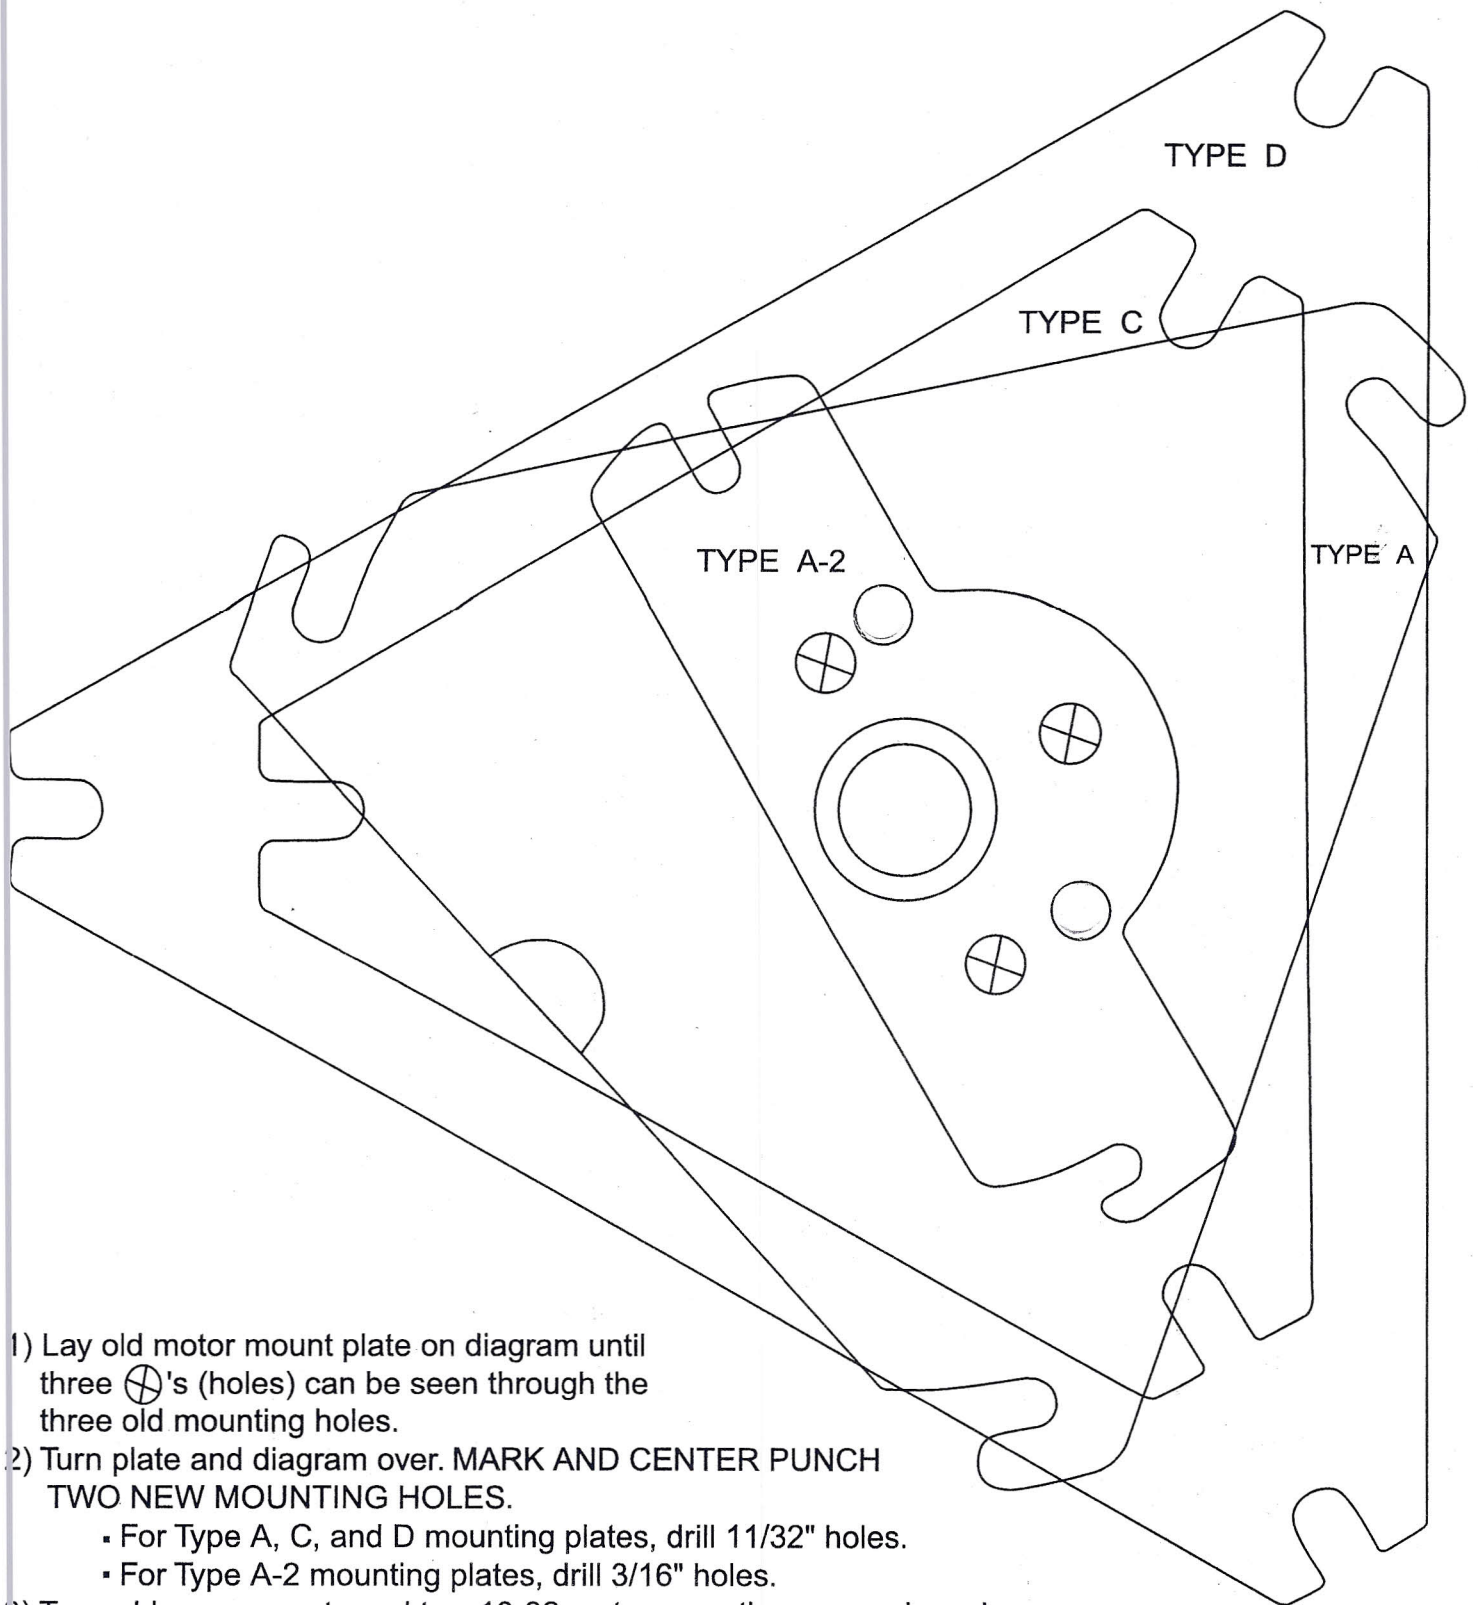

- 1) Lay old motor mount plate on diagram until three ⊕'s (holes) can be seen through the three old mounting holes.
- 2) Turn plate and diagram over. **MARK AND CENTER PUNCH TWO NEW MOUNTING HOLES.**
  - For Type A, C, and D mounting plates, drill 11/32" holes.
  - For Type A-2 mounting plates, drill 3/16" holes.
- 3) Two rubber grommets and two 10-32 motor mounting screws have been included with the motor.
  - On the A, C, and D plates, insert the grommets into the 11/32" holes prior to mounting the motor.
  - On the A-2 plate, use the grommets as washers between the motor and the mounting plate.