


Shampoo Fixtures

622 FLO-TEMP FIXTURE


622 FLO-TEMP FIXTURE INSTALLATION

NOTE: Please read these instructions through before starting to familiarize yourself with the various components.

1. We recommend that you install fixtures in the bowl before attaching the bowl to the cabinet or wall. For easier installation, place the bowl on its side or back.
2. Attach the Tailpiece to the Flo-Temp body. Seal the threads on mating ends with Teflon® tape.
3. Make sure the retaining ring is in place in the groove below the threads in the Flo-Temp body.
4. Insert the Flo-Temp and tailpiece assembly up through the fixture hole from the underside of the bowl.
5. Secure the fixture to the bowl by screwing the Escutcheon onto the Flo-Temp body threads. **DO NOT OVERTIGHTEN.**
6. Install the Stop Tube, Handle, Washer, Screw and Cover to the Flo-Temp body as shown.

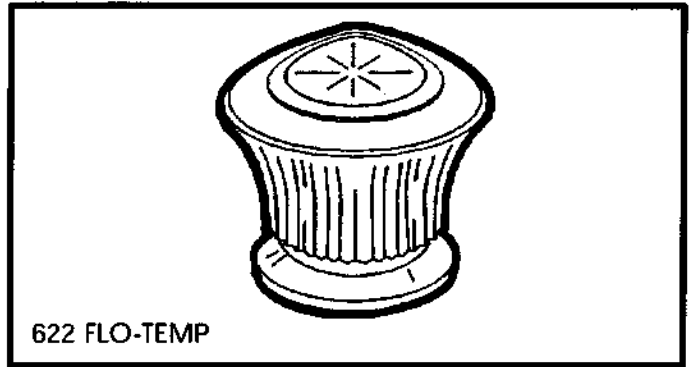

622 FLO-TEMP

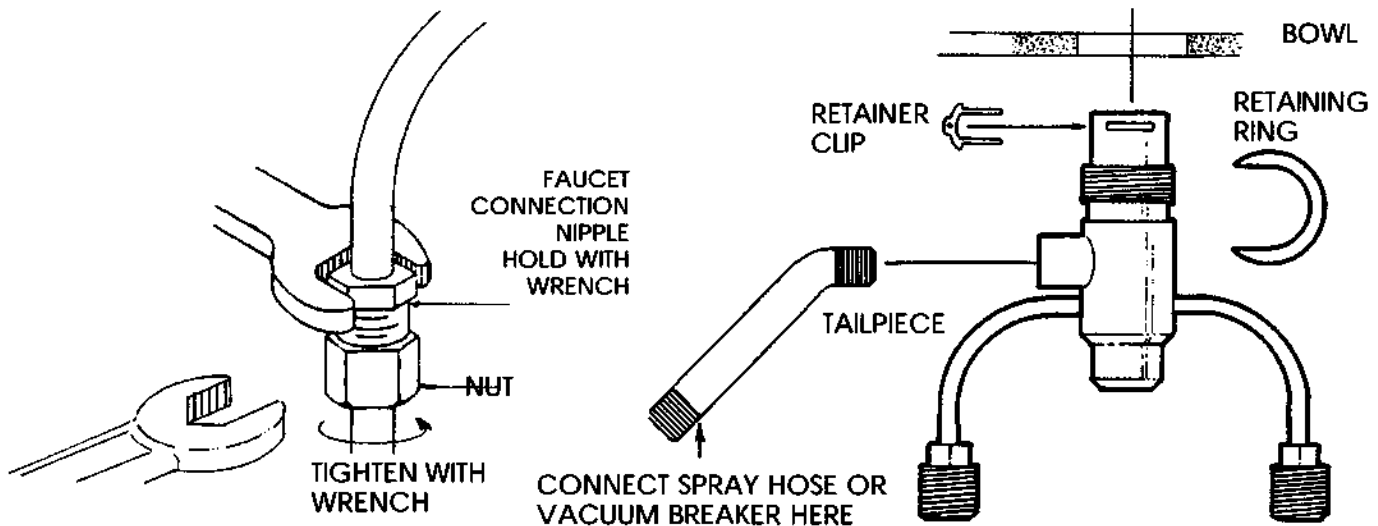

IMPORTANT NOTES:

Refer to the instructions packed with the Flo-Temp for more information on Flo-Temp operation. To prevent twisting or collapsing the tubing, hold the faucet connection nipples with a wrench when tightening Hot and Cold connections. Make sure the Cartridge Retainer Clip is in place before turning on the water.

belvedere

Belvedere USA Corporation
A wholly owned subsidiary of The Wella Corporation
One Belvedere Boulevard, Belvedere, Illinois 61008
Printed in U.S.A. E.C.O. 5295 4000648 Rev. 1-01